

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 854 567 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.07.1998 Bulletin 1998/30

(51) Int. Cl.⁶: H03B 5/12

(21) Application number: 98100726.3

(22) Date of filing: 16.01.1998

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 20.01.1997 JP 7120/97

(71) Applicant: NEC CORPORATION
Tokyo (JP)


(72) Inventor: Yamashita, Osamu
Minato-ku, Tokyo (JP)

(74) Representative:
Baronetzky, Klaus, Dipl.-Ing. et al
Patentanwälte
Dipl.-Ing. R. Splanemann, Dr. B. Reitzner, Dipl.-
Ing. K. Baronetzky
Tal 13
80331 München (DE)

(54) Voltage controlled oscillator circuit capable of switching between oscillation frequency bands

(57) A voltage controlled oscillator circuit using a negative resistance section (-R) for supplying electric power to the voltage controlled oscillator circuit and parallel resonance of the capacitance and the inductance of the circuit comprises a first variable capacitance diode (D_1) and a second variable capacitance diode (D_2) which are connected in parallel. The first variable capacitance diode (D_1) varies its capacitance according to a first control voltage (V_{band}) and thereby varies oscillation frequency (f_0) of the voltage controlled oscillator circuit. The second variable capacitance diode (D_2) varies its capacitance according to a second control voltage (V_{cont}) which is independent of the first control voltage (V_{band}), and thereby varies oscillation frequency (f_0) of the voltage controlled oscillator circuit independently. Coupling condensers (C_1 , C_2) are provided between the negative resistance section and the first variable capacitance diode (D_1), and between the first variable capacitance diode (D_1) and the second variable capacitance diode (D_2), in order to cut direct current off. According to the voltage controlled oscillator circuit, variable range of oscillation frequency can be remarkably enlarged and digitally switching the oscillation frequency between oscillation frequency bands is made possible.

FIG. 3

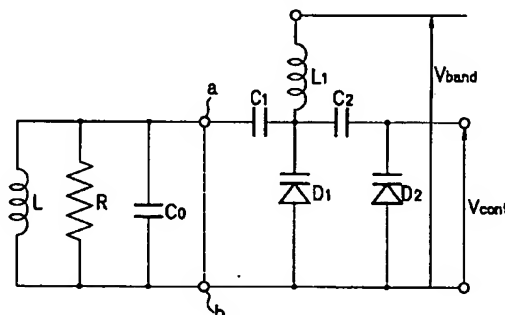

EP 0 854 567 A1

Description

BACKGROUND OF THE INVENTION

The present invention relates to a voltage controlled oscillator circuit, and in particular, to a voltage controlled oscillator circuit by which variable range of the oscillation frequency of the voltage controlled oscillator circuit can be enlarged and digitally switching of oscillation frequency of the voltage controlled oscillator circuit from one oscillation frequency band to another is made possible.

Description of the Related Art

Fig.1 is a circuit diagram showing a conventional voltage controlled oscillator circuit. The basic oscillation section of the voltage controlled oscillator circuit of Fig.1 is composed of a Colpitts type oscillation circuit, in which a variable capacitance diode D_1 is provided in order to vary the oscillation frequency of the voltage controlled oscillator circuit. An oscillation frequency control voltage E_c for controlling the oscillation frequency of the voltage controlled oscillator circuit is applied between a pair of terminals on the left-hand side of the circuit. When the oscillation frequency control voltage E_c is increased, the capacitance Cv_1 of the variable capacitance diode D_1 composing the parallel resonance circuit decreases, and thus the oscillation frequency of the voltage controlled oscillator circuit increases.

There are proposed some kinds of voltage controlled oscillator circuits in order to provide wider variable range of the oscillation frequency which varies according to the control voltage.

Fig.2 is a circuit diagram showing another conventional voltage controlled oscillator circuit which is disclosed in Japanese Patent Application Laid-Open No. HE17-231219. In the circuit of Fig.2, the basic oscillation section of the circuit is composed of a Colpitts type oscillation circuit in the same way as the circuit of Fig.1, and an inductor L_1 is provided in series with the variable capacitance diode D_1 . Further, the inductance L_1 of the inductor L_1 is selected so that the reactance (i.e. imaginary part of the impedance) of the series resonance circuit composed of the inductor L_1 and the variable capacitance diode D_1 will be capacitive (i.e. negative) all over the variable range of the oscillation frequency of the voltage controlled oscillator circuit.

In the voltage controlled oscillator circuit, the oscillation frequency is controlled by varying capacitance Cv_1 of the variable capacitance diode D_1 by varying the oscillation frequency control voltage E_c . Further, variable range of the capacitance Cv_1 of the variable capacitance diode D_1 with respect to a certain variable range of the oscillation frequency control voltage E_c is made larger than the case where the inductor L_1 is not connected in series with the variable capacitance diode D_1

(i.e. than the case of Fig.1). Therefore, wider variable range of the oscillation frequency is made possible in the voltage controlled oscillator circuit of Fig.1, by connecting the variable capacitance diode D_1 and the inductor L_1 together in series.

In the conventional voltage controlled oscillator circuit of Fig.2, the width of the variable range of the oscillation frequency controlled by the oscillation frequency control voltage E_c is fully dependent on the width of variable range of the capacitance Cv_1 of one variable capacitance diode D_1 . However, variable range of capacitance of coupled semiconductor devices in a variable capacitance diode is limited, and thus further extension of the range is nearly impossible. Therefore, there is a limitation in enlargement of the variable range of the oscillation frequency in the conventional voltage controlled oscillator circuit of Fig.2.

Further, in the conventional voltage controlled oscillator circuit of Fig.2, there is provided only one pair of terminals for inputting the oscillation frequency control voltage, and one oscillation frequency control signal supplied to the terminals is used. Therefore, it is impossible in the conventional circuit to switch the oscillation frequency digitally from one oscillation frequency band to another.

SUMMARY OF THE INVENTION

It is therefore the primary object of the present invention to provide a voltage controlled oscillator circuit in which the variable range of the oscillation frequency is further enlarged and digitally switching of the oscillation frequency between oscillation frequency bands is made possible.

In accordance with one aspect of the present invention, there is provided a voltage controlled oscillator circuit using a negative resistance section for supplying electric power to the voltage controlled oscillator circuit and parallel resonance of the capacitance and the inductance of the circuit. The voltage controlled oscillator circuit comprises a first variable capacitance diode and a second variable capacitance diode which is connected in parallel with the first variable capacitance diode. The first variable capacitance diode varies its capacitance according to a first control voltage and thereby varies oscillation frequency of the voltage controlled oscillator circuit, and the second variable capacitance diode varies its capacitance according to a second control voltage which is independent of the first control voltage and thereby varies oscillation frequency of the voltage controlled oscillator circuit independently.

Preferably, a first coupling condenser is provided between the negative resistance section and the first variable capacitance diode, and a second coupling condenser is provided between the first variable capacitance diode and the second variable capacitance diode.

Preferably, the first control voltage is applied to the first variable capacitance diode via a choking coil.

Preferably, an inductor is provided in series with the first variable capacitance diode,

Preferably, an inductor is provided in series with the second variable capacitance diode.

In accordance with another aspect of the present invention, there is provided a voltage controlled oscillator circuit whose oscillation frequency is decided according to the capacitance and the inductance of the circuit, comprising a capacitance section, a second variable capacitance diode, and a negative resistance section. The capacitance section is composed of a series connection of a first variable capacitance diode and an inductor, and varies its capacitance according to a first control voltage. The second variable capacitance diode is connected in parallel with the capacitance section, and varies its capacitance according to a second control voltage. And the negative resistance section is connected in parallel with the capacitance section, and supplies electric power to the voltage controlled oscillator circuit.

Preferably, a first coupling condenser is provided between the negative resistance section and the capacitance section, and a second coupling condenser is provided between the capacitance section and the second variable capacitance diode.

Preferably, the first control voltage is applied to the capacitance section via a choking coil.

In accordance with another aspect of the present invention, there is provided a voltage controlled oscillator circuit whose oscillation frequency is decided according to the capacitance and the inductance of the circuit, comprising a negative resistance section and a plurality of variable capacitance diodes. The negative resistance section supplies electric power to the voltage controlled oscillator circuit. The variable capacitance diodes are connected in parallel with the negative resistance section and in parallel with each other. The capacitance of each variable capacitance diode is controlled by a corresponding independent control voltage.

Preferably, coupling condensers are provided between the variable capacitance diodes, and between the negative resistance section and the adjacent variable capacitance diode.

Preferably, a control voltage is applied to corresponding one of the variable capacitance diodes via a choking coil.

Preferably, an inductor is provided in series with one of the variable capacitance diodes.

BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the present invention will become more apparent from the consideration of the following detailed description taken in conjunction with the accompanying drawings, in which:

Fig.1 is a circuit diagram showing a conventional voltage controlled oscillator circuit;

Fig.2 is a circuit diagram showing another conventional voltage controlled oscillator circuit which is disclosed in Japanese Patent Application Laid-Open No. HE17-231219;

Fig.3 is a circuit diagram showing a voltage controlled oscillator circuit according to an embodiment of the present invention;

Fig.4 is a circuit diagram showing a voltage controlled oscillator circuit according to the second embodiment of the present invention; and

Fig.5 is a circuit diagram of a phase locked loop in which the voltage controlled oscillator circuit of Fig.4 is installed.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to the drawings, a description will be given in detail of preferred embodiments in accordance with the present invention.

Fig.3 is a circuit diagram showing a voltage controlled oscillator circuit according to an embodiment of the present invention. In the following, an element of the circuit and a characteristic value of the element is represented by the same character. For example, capacitance of a capacitor C_0 is represented as C_0 and inductance of an inductor L_0 is represented as L_0 .

The circuit of Fig.3 comprises a variable capacitance diode D_1 , a variable capacitance diode D_2 , a capacitor C_0 , a negative resistance section $-R$, an inductor L , which are connected in parallel. Here, the part on the left-hand side of the broken line a-b (C_0 , $-R$, L) is a representation of a parallel resonance circuit without the variable capacitance diode D_1 , and the variable capacitance diode D_2 , which will be described below. Coupling condensers C_1 and C_2 for cutting direct current off is inserted between the variable capacitance diode D_1 and the left-hand side part, and between the variable capacitance diode D_1 and the variable capacitance diode D_2 , respectively.

Here, the part on the left-hand side of the broken line a-b will be explained. Actually, the left-hand side part is composed of a parallel resonance circuit including active elements for generating electric power such as transistors, which is supplied with power source voltage. The left-hand side part may be composed of the circuit of Fig.1 from which the variable capacitance diode D_1 and the coupling condenser C_1 in Fig.1 are removed. Incidentally, Fig.1 and Fig.3 are opposite in right-left direction and when the right-hand side of Fig.1 is used for this embodiment, the variable capacitance diode D_1 and the coupling condenser C_1 of Fig.1 are replaced by the right-hand side of the broken line a-b of Fig.3, that is, the right-hand side of the broken line a-b of Fig.3 is used instead of the variable capacitance diode D_1 and the coupling condenser C_1 of Fig.1. Of course, other parallel resonance circuits can be used as the left-hand side part of Fig.3. Therefore in Fig.3, the

negative resistance section -R, the capacitor C_0 and the inductor L are only representing the composite (synthesized) resistance, the composite capacitance and the composite inductance of the part on the left-hand side of the broken line a-b which has been described above. The negative resistance section -R is different from general resistance in the sense that it is supplied with the power source voltage and generates electric power in the voltage controlled oscillator circuit.

Next, the part on the right-hand side of the broken line a-b of Fig.3 will be explained. A DC voltage V_{band} is applied to the variable capacitance diode D_1 via a choking coil L_1 by a voltage source such as a constant-voltage regulated power supply. The choking coil L_1 is connected in series with the variable capacitance diode D_1 in order to prevent application of high frequency voltage generated in the circuit of Fig.3 to the voltage source. Another control voltage V_{cont} is applied to the variable capacitance diode D_2 by a voltage source which is independent of the voltage source of the DC voltage V_{band} . Further, aforementioned coupling condenser C_1 is inserted between the variable capacitance diode D_1 and the point 'a' in Fig.3 in order to prevent application of the DC voltage V_{band} (for being applied to the variable capacitance diode D_1) to the left-hand side of the broken line a-b. Here, the tips of arrows shown in Fig.3 represent high voltage sides of the control voltage V_{cont} and the DC voltage V_{band} , that is, the variable capacitance diode D_1 and the variable capacitance diode D_2 are connected inversely to the voltages which are applied thereto.

Here, when the part on the right-hand side of the negative resistance section -R is replaced with a capacitor C' having a composite capacitance C' , in other words, when the circuit of Fig.3 is regarded as a parallel resonance circuit composed of the inductor L, the negative resistance section -R and the capacitor C' , the circuit of Fig.3 can be regarded as an oscillation circuit whose oscillation frequency is controlled by the capacitance C' of the capacitor C' and the inductance L of the inductor L.

In the following, the operation of the voltage controlled oscillator circuit of this embodiment will be described in detail referring to Fig.3.

The oscillation frequency f_0 of the voltage controlled oscillator circuit is decided by the inductance L of the inductor L which is shown on the left-hand side of the broken line a-b, the composite capacitance C' which is composed of the capacitance C_0 of the capacitor C_0 , the capacitance D_1 of the variable capacitance diode D_1 , and the capacitance D_2 of the variable capacitance diode D_2 , as the following equation (1).

$$f_0 = \frac{1}{2\pi\sqrt{L \cdot C'}} \quad (1)$$

The oscillation frequency f_0 can be controlled by

varying the composite capacitance C' . The composite capacitance C' is approximately given by the sum of capacitance of capacitors connected in parallel, that is, $C_0 + D_1 + D_2$, and the composite capacitance C' can be varied by varying the capacitance D_1 of the variable capacitance diode D_1 by varying the DC voltage V_{band} , and by varying the capacitance D_2 of the variable capacitance diode D_2 by varying the control voltage V_{cont} which is independent of the DC voltage V_{band} . Incidentally, in order to vary the composite capacitance C' widely by the control voltage V_{cont} and the DC voltage V_{band} , it is preferable that the value C_0 is small, and D_1 and D_2 are dominant in the composite capacitance C' . As above, the oscillation frequency f_0 of the voltage controlled oscillator circuit can be controlled by two independent control voltages V_{cont} and V_{band} , thereby variable range of the oscillation frequency is enlarged and digitally switching the oscillation frequency between oscillation frequency bands is made possible.

Concretely, when switching of the oscillation frequency f_0 between oscillation frequency bands is unnecessary, the oscillation frequency f_0 of the voltage controlled oscillator circuit is controlled by varying the control voltage V_{cont} only, similarly to the operations of the conventional voltage controlled oscillator circuits of Fig. 1 and Fig.2. Here, variable range of the capacitance D_2 of the variable capacitance diode D_2 is limited, and thus the band to band switching (for example, 900MHz band to 1.8GHz band) of the oscillation frequency f_0 is impossible by varying the control voltage V_{cont} only. In order to execute the band to band switching, the DC voltage V_{band} is applied to the capacitance D_1 (or varied). By the operation, the capacitance D_1 of the variable capacitance diode D_1 varies, thereby the composite capacitance C' is varied and thus the oscillation frequency f_0 is varied according to the equation (1).

For example, in the case where the DC voltage V_{band} is switched from 0(V) to a certain positive value, the capacitance D_1 of the variable capacitance diode D_1 is switched to a lower value, thereby the composite capacitance C' is switched to a lower value and thus the oscillation frequency f_0 is switched to a higher frequency in the higher oscillation frequency band, according to the equation (1).

As shown above, in the voltage controlled oscillator circuit of this embodiment, by providing the variable capacitance diode D_2 and the variable capacitance diode D_1 in parallel, and varying the two control voltages V_{cont} and V_{band} independently, further enlargement of the variable range of the oscillation frequency is made possible. Further, digitally switching the oscillation frequency between oscillation frequency bands is realized by the switching of the DC voltage V_{band} which is independent of the control voltage V_{cont} for varying the capacitance D_2 of the variable capacitance diode D_2 .

Fig.4 is a circuit diagram showing a voltage controlled oscillator circuit according to the second embodi-

ment of the present invention. In Fig.4, the same reference characters as those of Fig.3 designate the same or corresponding parts to those of Fig.3 and thus repeated description thereof is omitted for brevity.

The voltage controlled oscillator circuit of Fig.4 is almost the same as the voltage controlled oscillator circuit of Fig.3, except that the variable capacitance diode D_1 of the circuit of Fig.3 is replaced with a capacitance section which is composed of the variable capacitance diode D_1 and an inductor L_0 . The inductor L_0 is added to the variable capacitance diode D_1 for adjusting the oscillation frequency to a desired value.

In the following, the operation of the voltage controlled oscillator circuit of the second embodiment will be described referring to Fig.4. The operation of the circuit of Fig.4 is almost the same as that of Fig.3, and thus repeated description of the operation common to both circuit is omitted for brevity.

The oscillation frequency f_0 of the voltage controlled oscillator circuit is decided by the inductance L of the inductor L which is shown on the left-hand side of the broken line a-b and the composite capacitance C' of the circuit on the right-hand side of the negative resistance section $-R$, and the oscillation frequency f_0 is approximately expressed by the aforementioned equation (1), in the case where the reactance of the circuit on the right-hand side of the negative resistance section $-R$ is capacitive. Here, for a certain variable range of the DC voltage V_{band} , variable range of the capacitance D_1 of the variable capacitance diode D_1 is widened due to the inductor L_0 connected in series, thereby variable range of the oscillation frequency is further enlarged in the voltage controlled oscillator circuit of Fig.4.

As shown above, in the voltage controlled oscillator circuit of the second embodiment, by providing the inductor L_0 in series with the variable capacitance diode D_1 of the circuit of Fig.3, the oscillation frequency of the voltage controlled oscillator circuit can be adjusted to a desired value, and the variable range of the oscillation frequency with respect to a certain variable range of the DC voltage V_{band} is made larger in comparison with the voltage controlled oscillator circuit of Fig.3. Incidentally, although the inductor L_0 is provided in series with the variable capacitance diode D_1 in this embodiment, it is as well possible to provide an inductor in series with the variable capacitance diode D_2 and obtain similar effects.

Fig.5 is a circuit diagram of a phase locked loop in which the voltage controlled oscillator circuit of Fig.4 is installed.

The phase locked loop of Fig.5 comprises a phase detector 1 for detecting phase difference between two input signals, a low pass filter 3 for cutting high frequency signals off, a voltage controlled oscillator circuit 201 according to the second embodiment of the present invention, a buffer 5 for receiving the oscillation output of the voltage controlled oscillator circuit 201 with high impedance and outputting an oscillation output signal

OUT, and a $1/N$ frequency demultiplier 202 for demultiplying the frequency of the oscillation output signal OUT supplied from the buffer 5 by N (N : a natural number which is set according to demultiplying number information supplied to the $1/N$ frequency demultiplier 202), while supplying the phase detector 1 with the frequency demultiplied signal.

In the following, the operation of the phase locked loop of Fig.5 will be described.

The phase detector 1 is supplied with a reference clock signal REF and the frequency demultiplied signal outputted by the $1/N$ frequency demultiplier 202. The reference clock signal REF has a predetermined fixed frequency f_{REF} . The phase detector 1 which is provided with a charge pump detects frequencies of both input signals and charges/discharges an electric charge stored in the low pass filter 3, according to phase difference between the frequency demultiplied signal and the reference clock signal REF. The low pass filter 3 whose electric charge is charged/discharged by the phase detector 1 cuts off high frequency signal components and outputs the control voltage V_{cont} to the variable capacitance diode D_2 in the voltage controlled oscillator circuit 201, according to the amount of the electric charge stored therein.

The capacitance of the variable capacitance diode D_2 to which the control voltage V_{cont} is applied becomes smaller as the control voltage V_{cont} becomes higher. And the oscillation frequency f_0 of the voltage controlled oscillator circuit 201 becomes higher as the capacitance of the variable capacitance diode D_2 becomes smaller. Therefore, the oscillation frequency f_0 becomes higher as the control voltage V_{cont} becomes higher, and becomes lower as the control voltage V_{cont} becomes lower. Here, in the case where the oscillation frequency f_0 becomes $f_{REF} \times N$ when the control voltage V_{cont} becomes V_{REF} , the difference between the control voltage V_{cont} and the V_{REF} gets larger if the phase difference between the reference clock signal REF and the frequency demultiplied signal gets larger, therefore, the frequency of the frequency demultiplied signal which is outputted by the $1/N$ frequency demultiplier 202 gets closer to the frequency f_{REF} of the reference clock signal REF as time passes. In the stationary state where the phase locked loop is phase locked, the oscillation frequency f_0 of the voltage controlled oscillator circuit 201 becomes N times the frequency of the reference clock signal REF (i.e. $f_{REF} \times N$).

In order to switch the oscillation frequency band of the voltage controlled oscillator circuit 201 and switch the frequency band of the oscillation output signal OUT, the demultiplying number information supplied to the $1/N$ frequency demultiplier 202 is changed and the N is switched to a larger number N' , and the DC voltage V_{band} is varied, for example, from 0(V) to a predetermined positive voltage. By the application of the DC voltage V_{band} , the capacitance D_1 of the variable capacitance diode D_1 is switched to a lower value, thereby the

composite capacitance C' is switched to a lower value and thus the oscillation frequency f_0 is switched to a higher frequency in the higher oscillation frequency band, according to the aforementioned equation (1). By the operation, the oscillation frequency of the voltage controlled oscillator circuit 201 is switched to a higher frequency which is equal to $f_{REF} \times N'$, and the phase locked loop of Fig.5 is phase locked in a new stationary state with its oscillation output signal OUT having the same higher frequency $f_{REF} \times N'$ in the higher frequency band.

The phase locked loop of Fig.5 is utilized, for example, in detectors of portable telephones for detection of radio wave frequency. In the following, a case where the phase locked loop of Fig.5 is applied to a dual band portable telephone will be described.

In order to design a portable telephone as a dual band portable telephone to operate in two radio wave frequency bands of, for example, 900MHz band and 1.8GHz band, the frequency f_{REF} of the reference clock signal REF of the dual band portable telephone can be set at 200KHz.

For use in the 900MHz band, the demultiplying number N of the $1/N$ frequency demultiplier 202 is set at a selected value $N1$ around 4500, and the DC voltage V_{band} for switching oscillation frequency band is set at 0(V) for example. In the stationary state where the phase locked loop is phase locked, the control voltage V_{cont} which is supplied from the low pass filter 3 to the variable capacitance diode D_2 is stabilized at 1.5(V) for example, and the oscillation frequency of the voltage controlled oscillator circuit 201 is stabilized at $N1 \times 200$ (kHz). For another frequency in the 900MHz band, the demultiplying number information supplied to the $1/N$ frequency demultiplier 202 is updated and the demultiplying number N is changed to a new selected value $N2$ around 4500, and the phase locked loop will be in a new stationary state with the control voltage V_{cont} of 1.6(V) for example, and the oscillation frequency of the voltage controlled oscillator circuit 201 of $N2 \times 200$ (kHz).

In order to switch the frequency band of the phase locked loop into the 1.8GHz band, the demultiplying number information supplied to the $1/N$ frequency demultiplier 202 is updated and the demultiplying number N is changed to a new selected value $N3$ around 9000, and the DC voltage V_{band} for switching oscillation frequency band is set at a positive value 3.0(V) for example. By the application of the DC voltage V_{band} , the capacitance D_1 of the variable capacitance diode D_1 is switched to a lower value, thereby the composite capacitance C' is switched to a lower value and thus the oscillation frequency f_0 of the voltage controlled oscillator circuit 201 is switched to a higher frequency in the higher frequency band, according to the equation (1). Then, the phase locked loop will be in a new stationary state with the control voltage V_{cont} of 1.5(V) for example, and the oscillation frequency of the voltage

controlled oscillator circuit 201 of $N3 \times 200$ (kHz). For another frequency in the 1.8GHz band, the demultiplying number information is updated and the demultiplying number N is changed to a new selected value $N4$ around 9000. Then, the phase locked loop will be in a new stationary state with the control voltage V_{cont} of 1.55(V) for example, and the oscillation frequency of the voltage controlled oscillator circuit 201 of $N4 \times 200$ (kHz).

In order to return the frequency band of the phase locked loop into the 900MHz band, the demultiplying number information is updated and the demultiplying number N is changed to a new selected value $N5$ around 4500, and the DC voltage V_{band} for switching the oscillation frequency band is returned to 0(V). Then, the phase locked loop will be in a new stationary state with the control voltage V_{cont} of 1.45(V) for example, and the oscillation frequency of the voltage controlled oscillator circuit 201 of $N5 \times 200$ (kHz).

As shown above, in the phase locked loop of Fig.5, fine frequency control of the oscillation output signal OUT can be executed by varying the demultiplying number N , and further, the band to band switching of the frequency of the oscillation output signal OUT can be executed by switching the DC voltage V_{band} and the demultiplying number N .

As set forth hereinabove, by the voltage controlled oscillator circuit according to the present invention, the variable range of the oscillation frequency can be remarkably enlarged, by providing two variable capacitance diodes connected in parallel in a voltage controlled oscillator circuit and controlling the capacitance thereof by two independent oscillation frequency control voltages.

Further, digitally switching the oscillation frequency between oscillation frequency bands is made possible, by using one oscillation frequency control voltage for fine control of the oscillation frequency and using the other oscillation frequency control voltage for the switching between oscillation frequency bands.

Incidentally, although the number of the variable capacitance diodes included in the voltage controlled oscillator circuit is two in the embodiments shown above, it is of course as well possible to compose a voltage controlled oscillator circuit according to the present invention which includes three or more variable capacitance diodes, and similar effects can be obtained by such voltage controlled oscillator circuits.

While the present invention has been described with reference to the particular illustrative embodiments, it is not to be restricted by those embodiments but only by the appended claims. It is to be appreciated that those skilled in the art can change or modify the embodiments without departing from the scope and spirit of the present invention.

Claims

1. A voltage controlled oscillator circuit using a negative resistance section (-R) for supplying electric power to the voltage controlled oscillator circuit and parallel resonance of the capacitance and the inductance of the circuit comprising:
 - a first variable capacitance diode (D_1) for varying the capacitance thereof according to a first control voltage (V_{band}) and thereby varying oscillation frequency (f_0) of the voltage controlled oscillator circuit; and
 - a second variable capacitance diode (D_2) which is connected in parallel with the first variable capacitance diode (D_1), for varying the capacitance thereof according to a second control voltage (V_{cont}) and thereby varying oscillation frequency (f_0) of the voltage controlled oscillator circuit.
2. A voltage controlled oscillator circuit as claimed in claim 1, wherein:
 - a first coupling condenser (C_1) is provided between the negative resistance section and the first variable capacitance diode (D_1), and a second coupling condenser (C_2) is provided between the first variable capacitance diode (D_1) and the second variable capacitance diode (D_2).
3. A voltage controlled oscillator circuit as claimed in claim 1, wherein the first control voltage (V_{band}) is applied to the first variable capacitance diode (D_1) via a choking coil (L_1).
4. A voltage controlled oscillator circuit as claimed in claim 1, wherein an inductor (L_0) is provided in series with the first variable capacitance diode (D_1).
5. A voltage controlled oscillator circuit as claimed in claim 1, wherein an inductor is provided in series with the second variable capacitance diode (D_2).
6. A voltage controlled oscillator circuit whose oscillation frequency is decided according to the capacitance and the inductance of in the circuit, comprising:
 - a capacitance section composed of a series connection of a first variable capacitance diode (D_1) and an inductor L_0 , for varying the capacitance thereof according to a first control voltage (V_{band});
 - a second variable capacitance diode (D_2) which is connected in parallel with the capacitance section (D_1), for varying the capacitance thereof according to a second control voltage (V_{cont}); and
 - a negative resistance section (-R) which is connected in parallel with the capacitance section (D_1), for supplying electric power to the voltage controlled oscillator circuit.
7. A voltage controlled oscillator circuit as claimed in claim 6, wherein:
 - a first coupling condenser (C_1) is provided between the negative resistance section and the capacitance section, and
 - a second coupling condenser (C_2) is provided between the capacitance section and the second variable capacitance diode (D_2).
8. A voltage controlled oscillator circuit as claimed in claim 6, wherein the first control voltage (V_{band}) is applied to the capacitance section via a choking coil (L_1).
9. A voltage controlled oscillator circuit whose oscillation frequency is decided according to the capacitance and the inductance of the circuit, comprising:
 - a negative resistance section (-R) for supplying electric power to the voltage controlled oscillator circuit, and
 - a plurality of variable capacitance diodes (D_1 , D_2) which are connected in parallel with the negative resistance section (-R) and in parallel with each other, in which the capacitance of each variable capacitance diode (D_1 , D_2) is controlled by a corresponding independent control voltage (V_{band} , V_{cont}).
10. A voltage controlled oscillator circuit as claimed in claim 9, wherein coupling condensers (C_1 , C_2) are provided between the variable capacitance diodes (D_1 , D_2), and between the negative resistance section (-R) and the adjacent variable capacitance diode (D_1).
11. A voltage controlled oscillator circuit as claimed in claim 9, wherein a control voltage (V_{band}) is applied to corresponding one of the variable capacitance diodes (D_1) via a choking coil (L_1).
12. A voltage controlled oscillator circuit as claimed in claim 9, wherein an inductor (L_0) is provided in series with one of the variable capacitance diodes (D_1).

FIG. 1 PRIOR ART

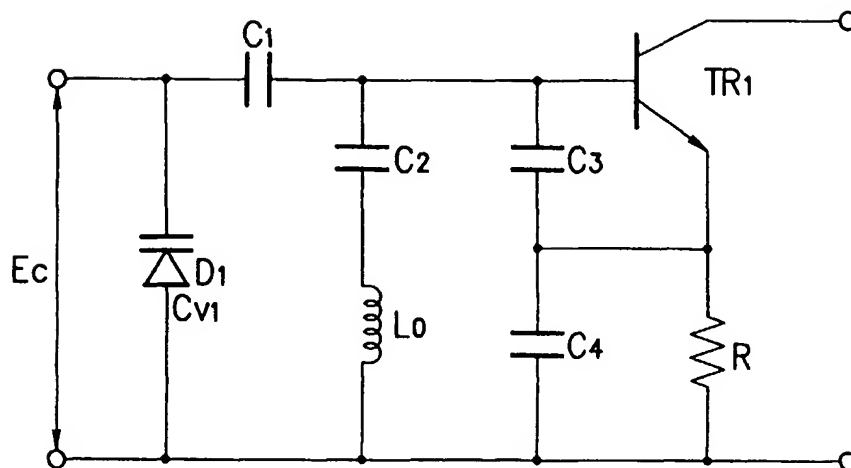


FIG. 2 PRIOR ART

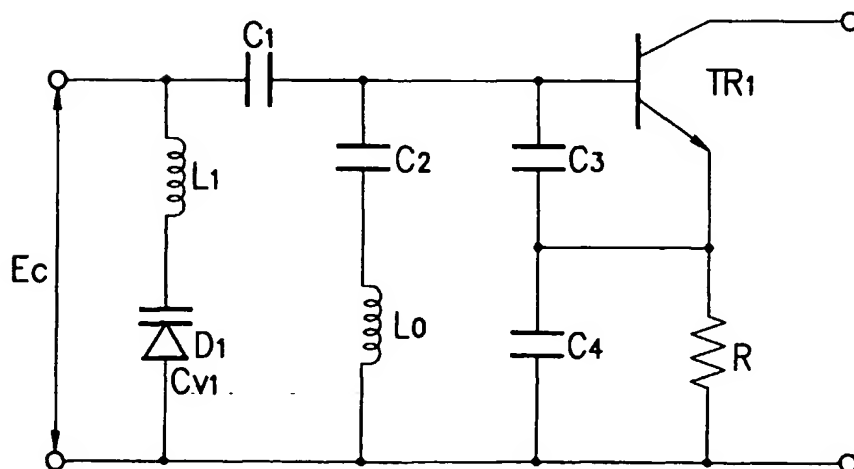


FIG. 3

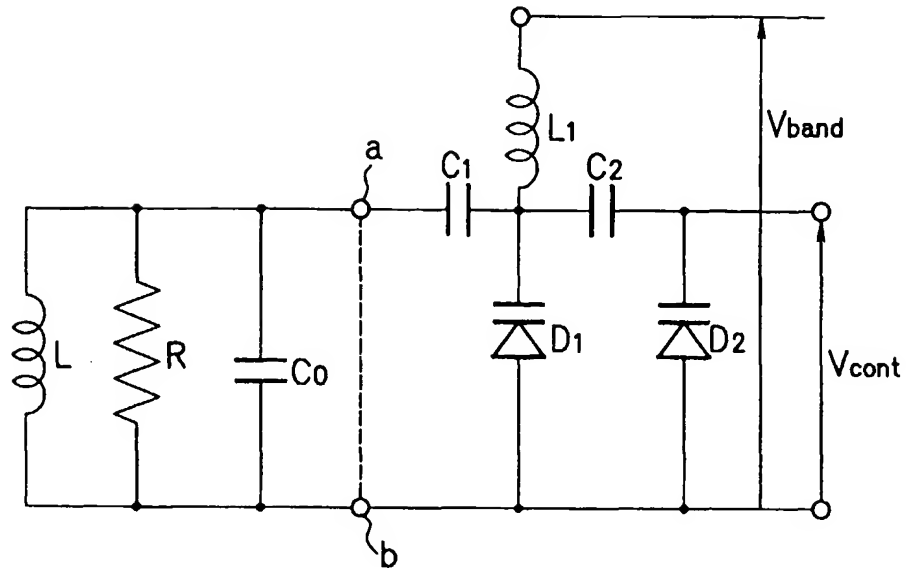


FIG. 4


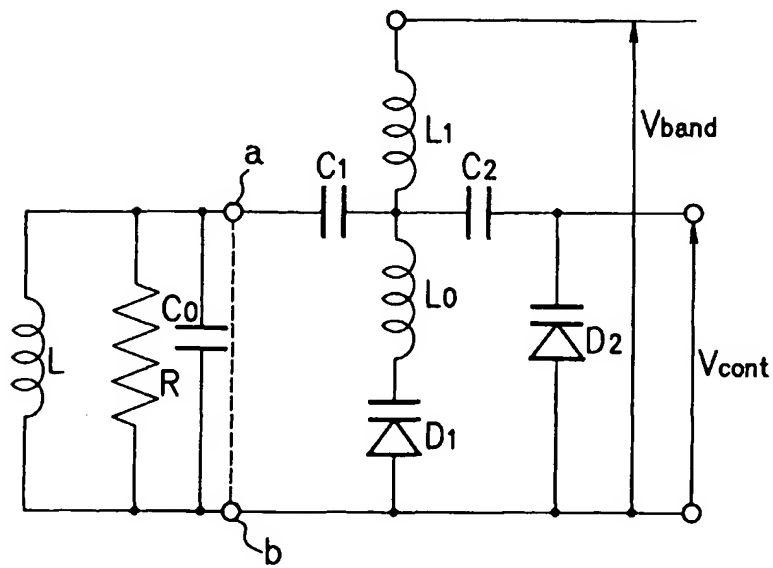


FIG. 5



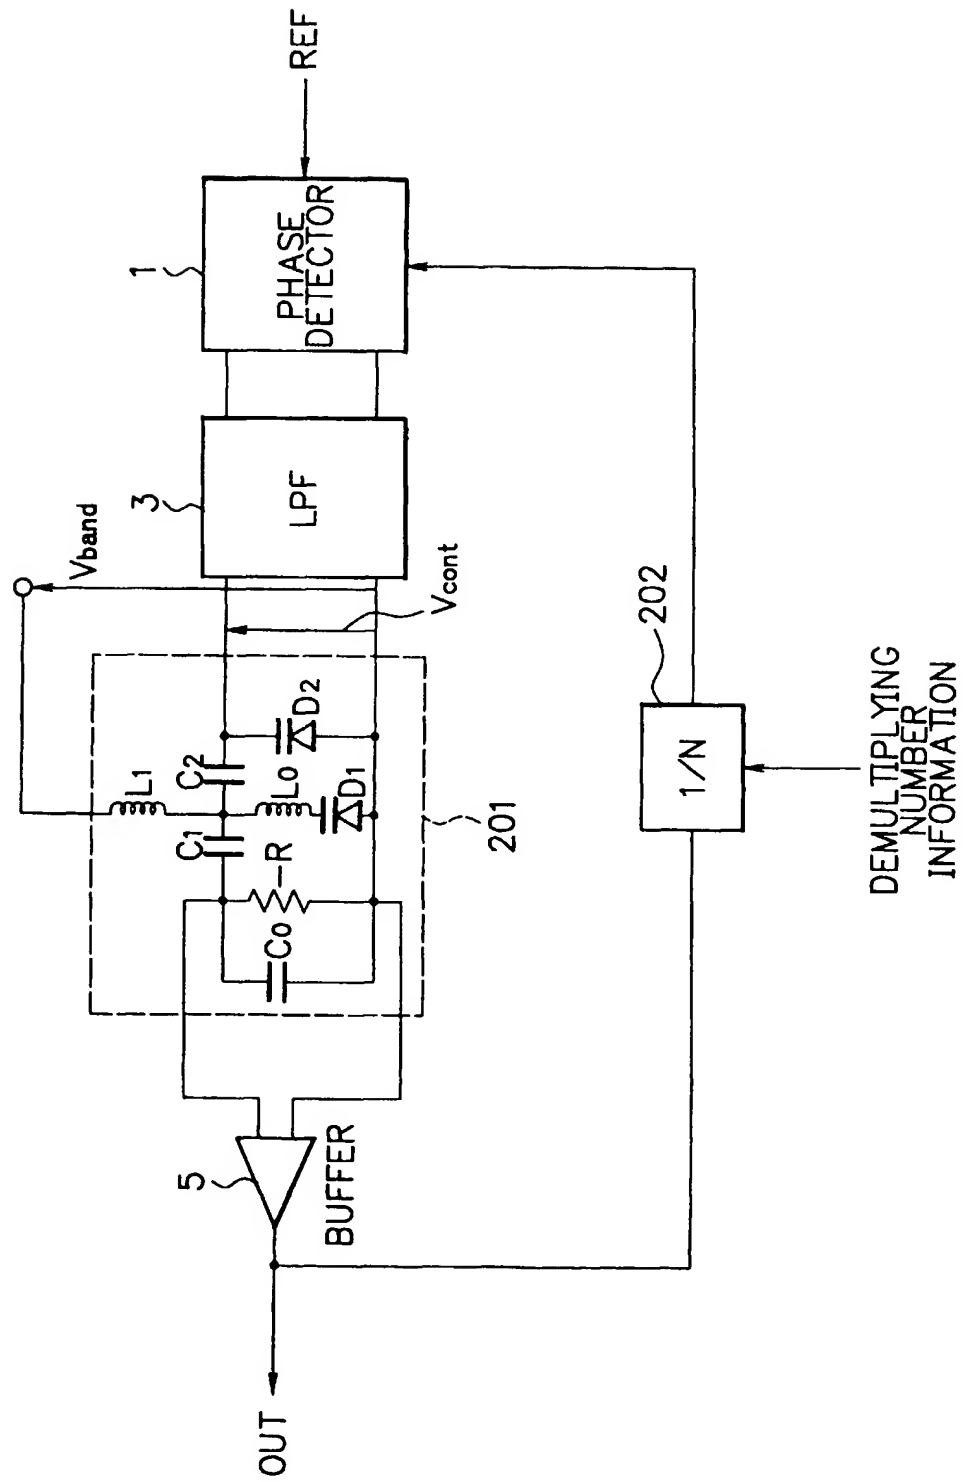

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 10 0726

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	PATENT ABSTRACTS OF JAPAN vol. 017, no. 378 (E-1398), 15 July 1993 & JP 05 063438 A (HITACHI DENSHI LTD), 12 March 1993, * abstract *	1,2,9,10	H03B5/12
Y	---	3-8,11, 12	
X	GB 2 215 929 A (ALPS ELECTRIC CO LTD) * page 2, line 16 - page 4, line 6; figure 1 *	1,2,9,10	
Y	---	3-8,11, 12	
Y	GB 2 196 197 A (TELEFUNKEN ELECTRONIC GMBH) * figure 1 *	3,8,11	
D,Y	PATENT ABSTRACTS OF JAPAN vol. 095, no. 011, 26 December 1995 & JP 07 231219 A (FUJITSU GENERAL LTD), 29 August 1995, * abstract *	4-7,12	
A	US 4 216 451 A (NISHIMURA ITSURO ET AL) * figure 2 *	1,6,9	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	US 4 518 930 A (ROZEMA JOHN G ET AL) * figure 2 *	1,6,9	H03B H03J
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 2 April 1998	Examiner Ratajski, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P4/C01)